

GENERAL

By addressing issues that could result in vibration and noise during installation, Kayse Fan-Coil hoses offer a useful, simple, and secure connection. Spot corrosions that could result from moisture at the fitting connection (welding points) are prevented by its unique welding technology, and optional welding protection sheaths also prevent issues that could result from improper grounding, ensuring that the installation is fully sealed for many years. The systems make use of fan-coil connections, combi boilers, water heaters, reservoirs, sanitary systems, solar energy systems, etc.




ADVANTAGES

- It provides full sealing and is long-lasting
- Vibration impacts are kept to a minimum thanks to its flexible structure
- Without cross-sectional constriction, fluid transmission is guaranteed
- Attaches quickly to nearly all types of fittings
- Depending on the material they are made of, metal hoses can withstand temperatures of up to 700–800 °C
- Unlike the majority of other hose types, it can handle a wide range of substances.




ORDER CODES

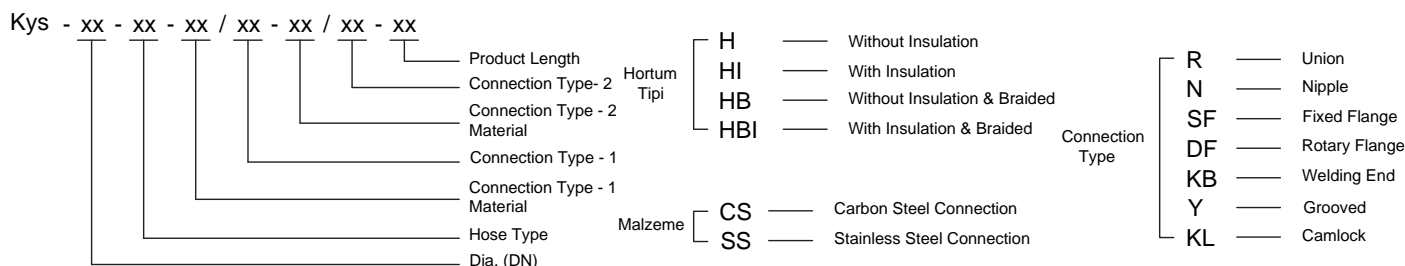


Kys - [] [] [] - [] [] [] - [] [] / [] [] - [] [] / [] [] - [] [] [] [] [] []

Standard Product Materials		Optional Product Materials	
Hose	1.4301 (AISI 304)	Hose	1.4401 (AISI 316)
Braid	-	Braid	Stainless Steel
Fittings	1.0038 (St 37-2)	Fittings	Stainless Steel

Design Parameters	
Design Pressure	0 - 3 bar
Design Temperature	100 °C (max.)
Connection Dia.	DN12 - DN65
Connection Types	Union x Nipple / Union x Union / Nipple x Nipple
Certificates	TSE - CE Module H (Optional)

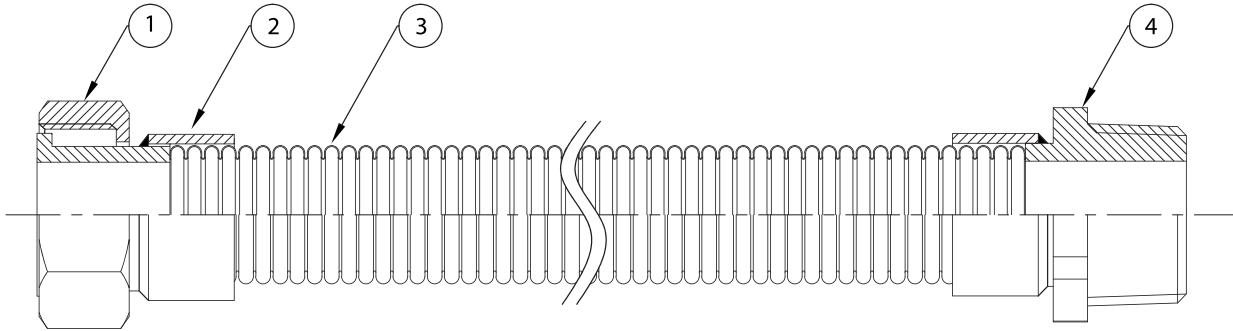

Part Number	Properties	
	Part Name	Materials
1	Union (Nippel Optional)	1.0038 (ST 37-2)
2	Reinforcement Ring	1.4301 (AISI 304)
3	Flexible Metal Hose	1.4301 (AISI 304)
4	Nippel (Union Optional)	1.0038 (ST 37-2)

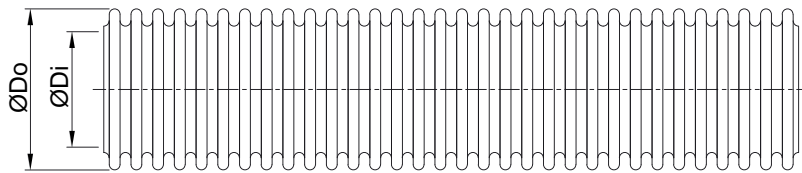

Kys ...H (Unbraided)

DN		Di (mm)	Do (mm)	Bending Radius (mm)		Working Pressure (bar)
mm	inch			Static	Dynamic	
12	1/2"	12,1	16,7	50	200	3,0
16	5/8"	16,2	21,6	50	200	3,0
20	3/4"	20,7	26,8	70	200	2,0
25	1"	25,7	32,3	90	200	2,0
32	1 1/4"	32,7	41,1	110	250	1,5
40	1 1/2"	40,7	49,1	130	250	1,5
50	2"	50,7	60,2	175	350	1,0
65	2 1/2"	65,7	80,1	200	410	1,0

• Please contact our sales team for different connection sizes and materials